


How To Crimp crucibles for Chip DSC

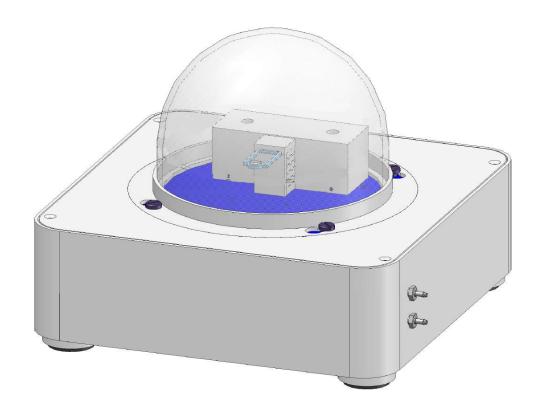

Linseis Messgeräte GmbH Gerlach

Stand: 04.04.2019

How To Crimp Crucibles for Chip DSC



Index

| 1. | The sample press and crimping tool | .3 |
|----|-------------------------------------|----|
| 2. | Prepare the Sample press and sample | .4 |
| 4. | Crimp the Crucible | .5 |



1. The sample press and crimping tool





2. Prepare the sample press and sample

- Put the upper part from the crimping tool off



Insert the crucible (make sure the bottom of the crucible is flat)



- Insert the sample into the crucible and put on the lid on the crucible



4. Crimp the Crucible

- Put the crucible holder back on the lower part of the crimping tool



- Pull down the rod of the crimping tool and crimp the crucible
- Use enough power on it, so that the crucible is pressed well



- Put the upper part of the crimping tool off from the sample press
- Your sample is ready now

